


ELEG 667-016; MSEG-667-016 - Solid State Nanoelectronics – Fall 2005

Homework #8 - due Tuesday, 22 November 2005, in class

1. **Carbon Nanotube Structure:** Derive the expressions for the unit vectors of graphene (unrolled nanotube)  $\mathbf{a}_1, \mathbf{a}_2$ , in terms of the Cartesian unit vectors  $\hat{x}, \hat{y}$ . (a) Using trigonometry, show your calculations for the numerical factors  $a$  and  $b$  (e.g.  $\frac{1}{2}$  or whatever) in terms of the length of the carbon-carbon bond length,  $a_0$ . (b) sketch and indicate the unit cell in real space, which is the parallelogram spanned by  $\mathbf{a}_1$ , and  $\mathbf{a}_2$ . Hint, consider the figures below.

$$\bar{\mathbf{a}}_1 = a\hat{x} + b\hat{y}$$

$$\bar{\mathbf{a}}_2 = a\hat{x} - b\hat{y}$$

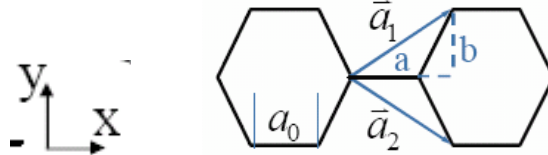


2. **Carbon Nanotube Dispersion:** Consider the dispersion relation for graphene:

$$W(k_x, k_y) = \pm \gamma_0 [1 + 4\cos(\sqrt{3}k_x a/2) \cos(k_y a/2) + 4\cos^2(k_y a/2)]^{1/2},$$

following the notation in Waser, where  $a = \sqrt{3}a_0$  is the length of the unit vector  $\mathbf{a}_i$ , and  $a_0$  is the length of the carbon-carbon bond (0.142 nm). Note that this “ $a$ ” differs from the convention used above in question 1. (a) Find the six Fermi level conduction points in  $k$ -space (which are the corners of the hexagonal Brillouin zone below) by solving for the  $k$  values where  $W(k_x, k_y) = 0$ . (b) On the hexagonal Brillouin zone, sketch and label the coordinates of these 6 points in terms of  $a$ , or  $a_0$ .

Hint: in the dispersion relation first let  $k_x = 0$  and solve for the corner points along  $k_y$ ; and then let  $\sqrt{3}k_x a/2 = \pi$ , and get the corners with  $k_x \neq 0$ . This approach makes it easier to factor the dispersion terms under the root as a perfect square. Then take the square root and solve for  $k_{x,y}$ .



3. **Carbon Nanotube Metallic condition:** Show that the condition for metallic conductivity of chiral nanotubes:  $2n_1 + n_2 = 3q$ , where  $q$  is an integer, can be obtained by substituting the  $\mathbf{k}$  vector of one of the corner points of the Brillouin zone into the periodic boundary condition:  $\mathbf{C}_h \cdot \mathbf{k} = 2\pi m$ , where  $\mathbf{C}_h = n_1 \mathbf{a}_1 + n_2 \mathbf{a}_2$  is the chiral vector, and  $m$  is an integer. (Hint: use vector coordinates with respect to  $x$  and  $y$ , and a zone boundary point that has both  $x$  and  $y$  components).

Homework assignments will appear on the web at:

[http://www.ece.udel.edu/~kolodzey/courses/eleg667\\_016f05.html](http://www.ece.udel.edu/~kolodzey/courses/eleg667_016f05.html)

Note: On each submission, give your name, due date, assignment number and course number.