


ECE615 Mixed-Signal IC Design

Lecture 3 Slides: Spectral Estimation


Vishal Saxena, Boise State University
(vishalsaxena@boisestate.edu)

Mixed Signal IC Laboratory
Boise State University

Coherent Sampling

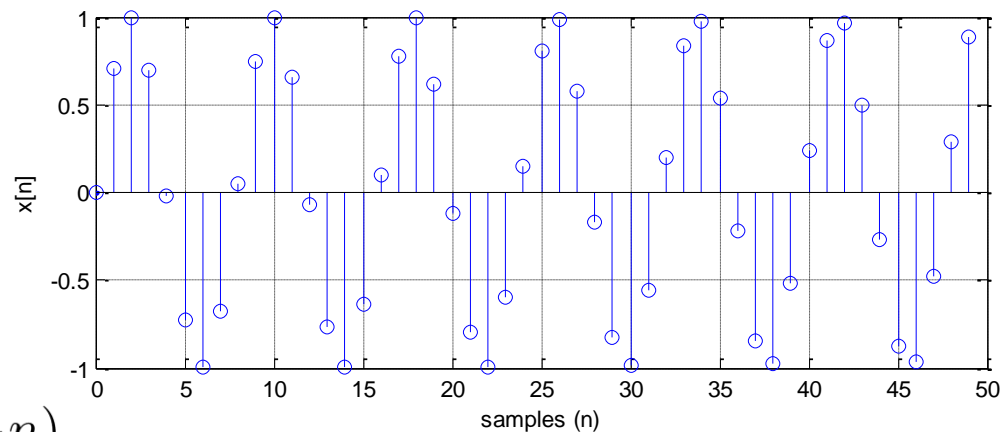


$$x[n] = \sin\left(2\pi \frac{f_{in}}{f_s} n\right)$$

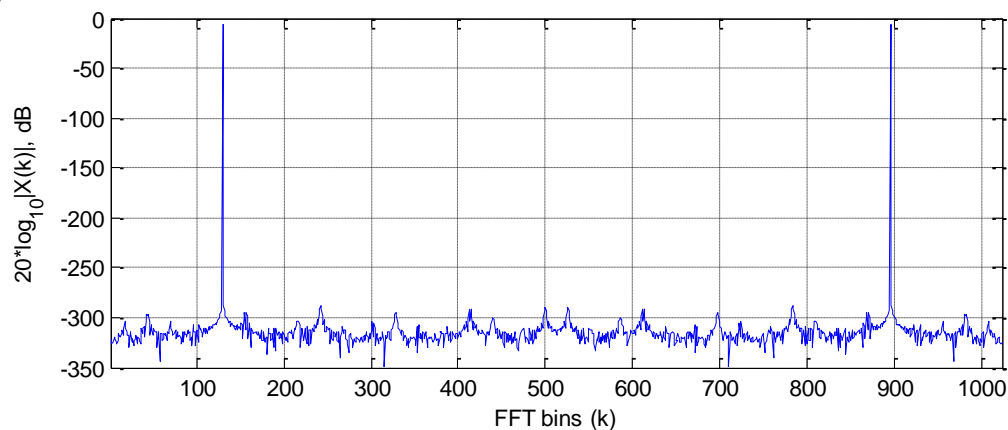

$$\frac{f_{in}}{f_s} = \frac{129}{1024}$$

file:FFTdemo1.m


Non-Coherent Sampling : FFT leakage

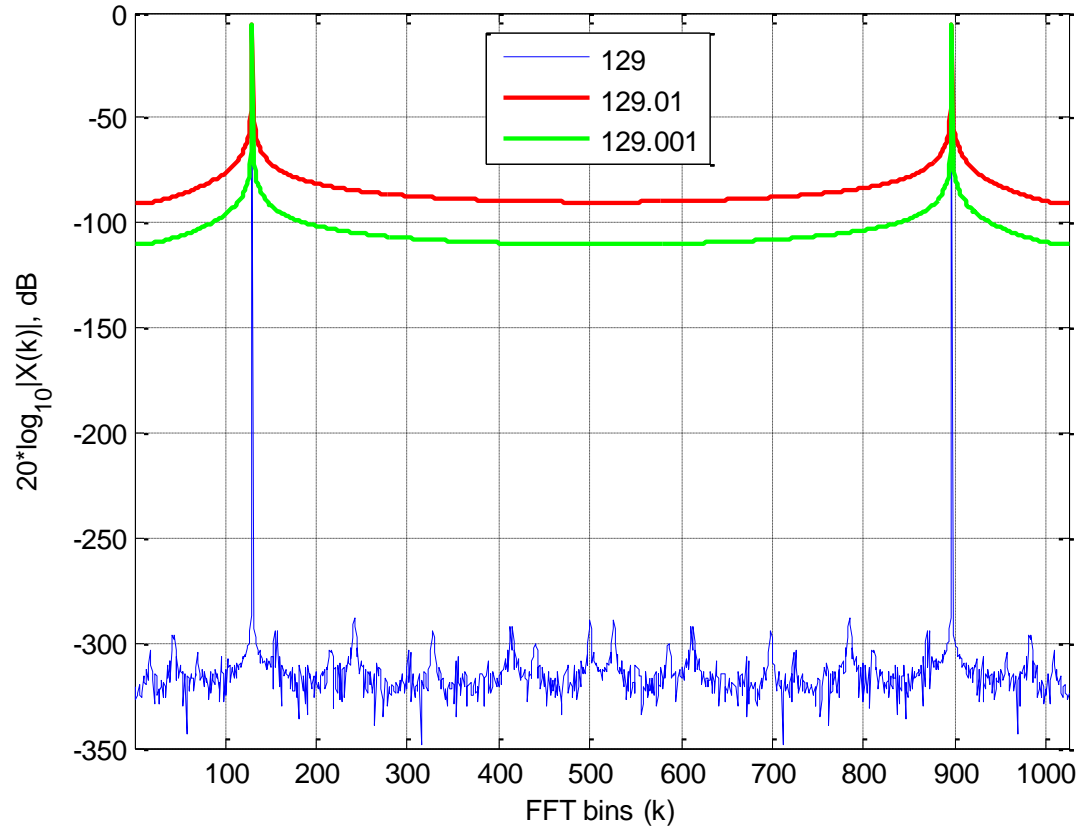

$$\frac{f_{in}}{f_s} = \frac{129}{1024}, \frac{129.01}{1024}, \frac{129.001}{1024}$$

file:FFTdemo2.m


FFT leakage contd.

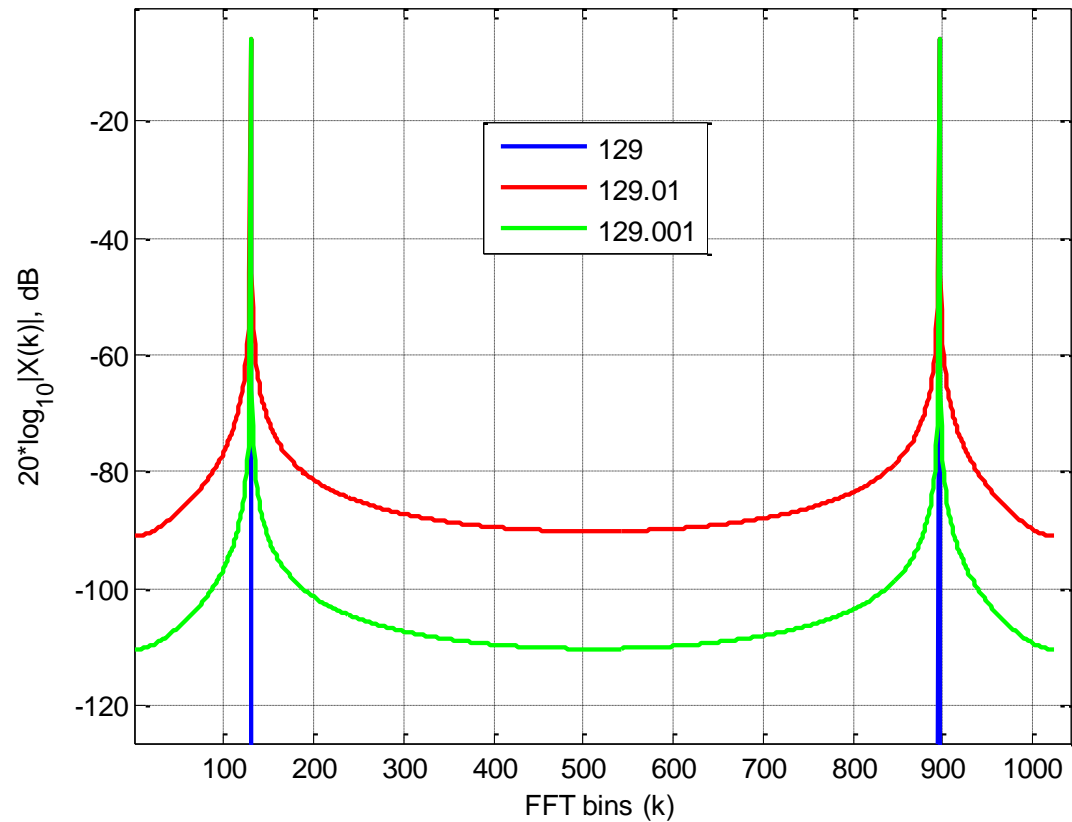

$$\frac{f_{in}}{f_s} = \frac{129}{1024}, \frac{129.01}{1024}, \frac{129.001}{1024}$$

file:FFTdemo2.m

Spectral Windows

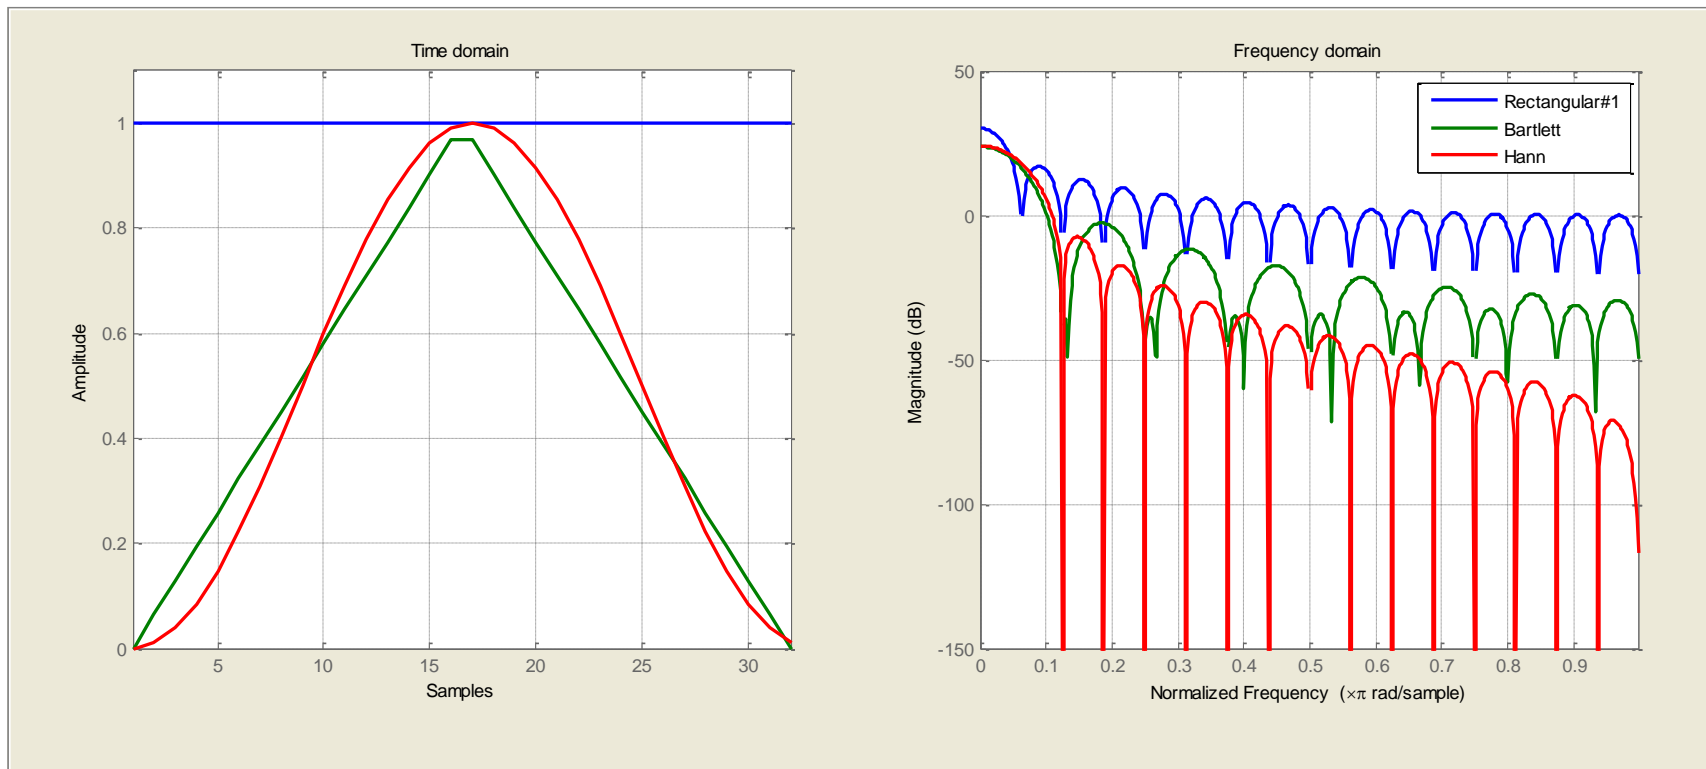


% Compare Rect, Bartlett and Hann windows

L = 32;

wvtool(rectwin(L), bartlett(L), ds_hann(L));

Spectral Windows contd.

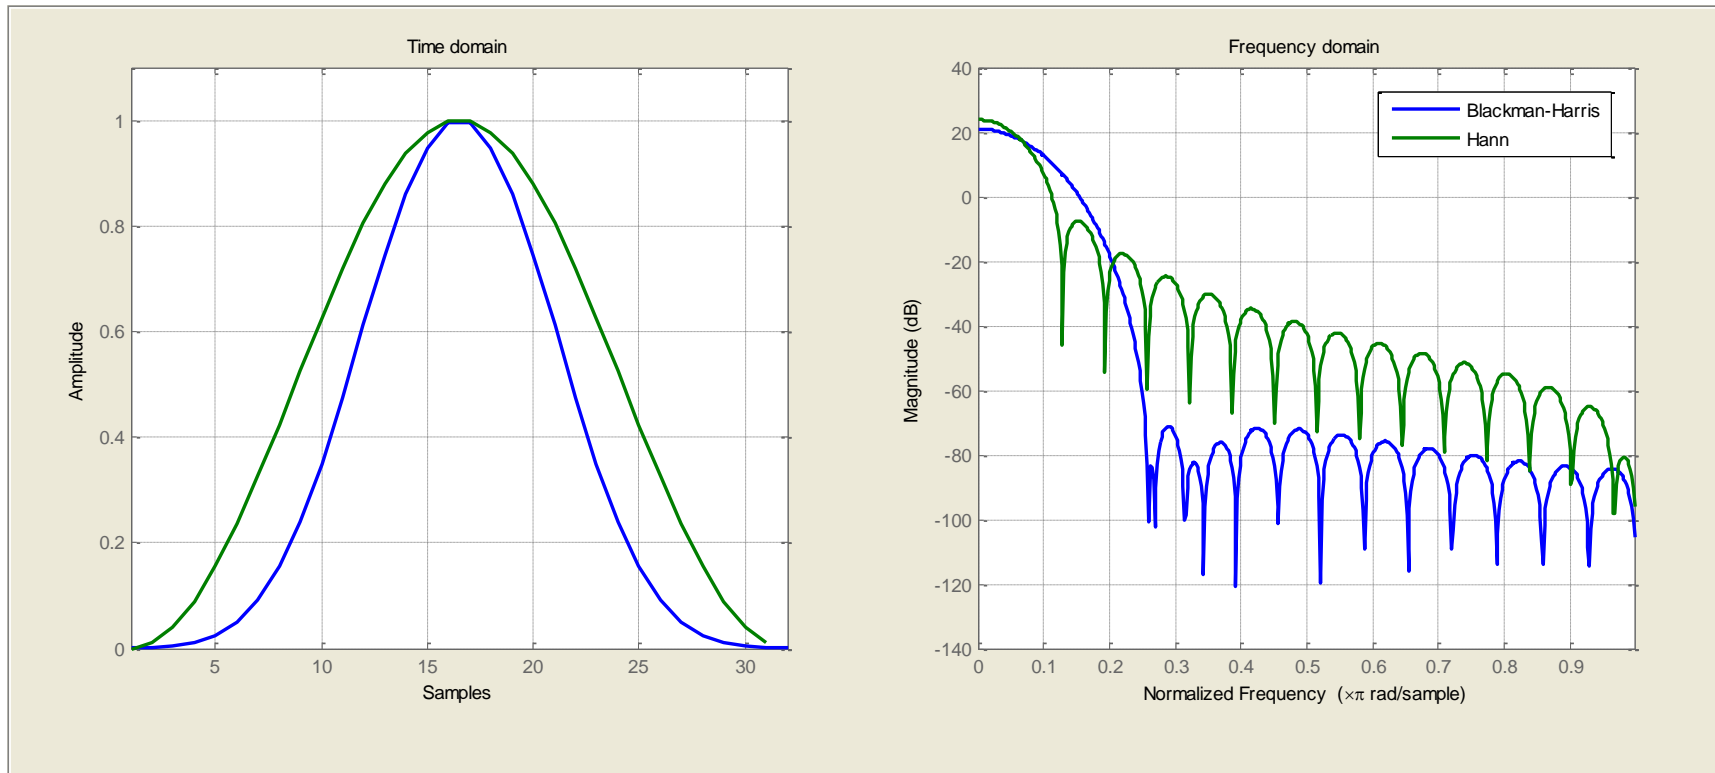


% Compare Blackman-Harris and Hann windows

L = 32;

wvtool(blackmanharris(L), ds_hann(L));

FFT with Windowing

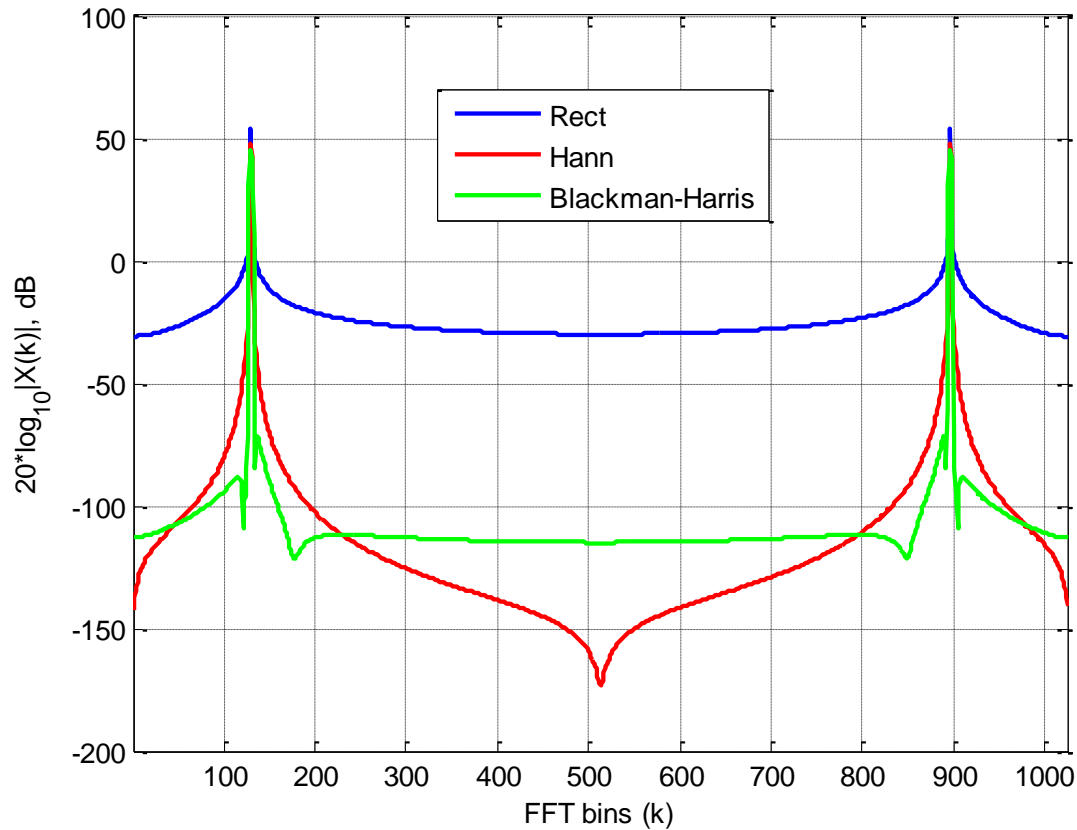

$$\frac{f_{in}}{f_s} = \frac{129.01}{1024}$$

file:FFTdemo_windowing.m